

# (12) UK Patent Application (19) GB (11) 2 396 648 (13) A

(43) Date of Printing by UK Office 30.08.2004

(21) Application No: 0406388.3

(22) Date of Filing: 19.09.2002

(30) Priority Data:  
 (31) 80323220 (32) 19.09.2001 (33) US  
 (31) 10242112 (32) 12.09.2002

(86) International Application Data:  
PCT/US2002/023623 En 19.09.2002(87) International Publication Data:  
WO2003/025326 En 27.03.2003

(71) Applicant(s):  
 Baker Hughes Incorporated  
 (Incorporated in USA - Delaware)  
 3900 Essex Lane, Suite 1200, Houston,  
 Texas 77027, United States of America


(72) Inventor(s):  
 Housman M Shammal  
 John M Michaels

(continued on next page)

(51) INT CL7:  
E21B 49/10(52) UK CL (Edition W):  
E1F FHB(56) Documents Cited by ISA:  
Not yet advised(58) Field of Search by ISA:  
Other: Not yet advised

(54) Abstract Title: Dual piston single phase sampling mechanism and procedure

(57) A method and apparatus for maintaining the single phase integrity of a deep well formation sample that is removed to the surface comprises a vacuum jacket (32) insulated single working cylinder (30) divided by two free pistons (54, 56) into three variable volume chambers (60, 62, 64). The intermediate chamber (62) is pre-charged with a fixed quantity of high pressure gas. Wellbore fluid freely admitted to one end chamber (64) bears against one free piston (56) to further compress the gas. The formation sample is pumped into the other end chamber (54) to first, displace the wellbore fluid from the first end chamber (64) and, sequentially, to further compress the gas to preserve the sample phase state upon removal to the surface.

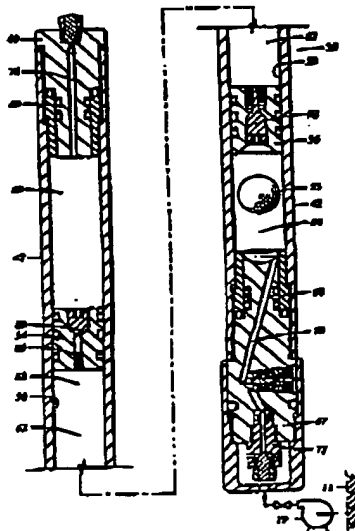

GB 2396648 A continuation

(72) cont

James T Carnosek  
Michael J Moody  
Phillip Willis

(74) Agent and/or Address for Service:  
Hasekline Lake & Co  
Imperial House, 15-19 Kingsway,  
LONDON, WC2B 6UD, United Kingdom